

IQ

P L U S

800-810

DIGITAL WEIGHT INDICATORS



ANOTHER **REVOLUTION**™ SOLUTION
SCALE SOFTWARE



THE ULTRA-VERSATILE 800. EASY TO USE, HARD TO BEAT.



Redefining Application Flexibility



THE ULTRA-POWERFUL 810. UNLIMITED POSSIBILITIES.



Anywhere You Weigh...

Whether it's shipping and receiving, in-plant operations, inventory control, vessel weighing, or process weighing, the IQ plus 800 is the ideal solution. The stainless steel NEMA 4X enclosure is adjustable to any angle and incorporates a comfortable "telephone" style keypad. The bright VFD display reads easily, even in environments with poor visibility.

The 800 powers up to 16 350-ohm load cells on one or two scale input channels. Each scale can be set up independently, giving you unlimited capacity flexibility to meet your specific operational requirements.

Combine the fundamental "horsepower" of the 800 with its many standard features and options, and you have everything required to create an affordable, custom-tailored industrial weighing system.

Increase Truck Scale Profitability...

Manage your truck scale operation with a new level of efficiency. Six configuration choices allow you to select from operator-entered tare, weigh-in/ weigh-out, reverse weighing with value swapping, stored tare recall, and more. The 800's powerful memory allows storage of up to 200 six-digit truck ID numbers and tare weights, automating your operation.

Create any ticket formats you wish using up to 300 available character locations. Company names, weight, time and location data can be placed anywhere on the ticket. Enter straight from the convenient front-panel keypad, or from a PC. Time and date may be automatically printed on each transaction.



Intelligent Automation for Increased Profitability...

Whether you need a simple checkweighing alarm or full batch control, the IQ plus 800 can get you there without the high cost of additional controllers and custom software consultants. Twenty standard batch steps offer a wide array of preset and programmable features, including: free-running setpoints, relative setpoints, % relative, weight bands, preacts, pauses, jogs, timers, and many others. Custom setpoint names can be assigned as product or ingredient names via the EDP port, simplifying operator interaction.

Three digital inputs and four digital outputs are standard. With the addition of the 12 digital output option, a total of 16 TTL outputs are available.

The universal Remote I/O link or Profibus options offer sophisticated control of your weight process, while providing localized control of the individual weighing workstation.



Setpoint naming feature provides operator with instant, error-free process information.

Available on both the 800 and 810, our exclusive Rattletrap® vibration control eliminates interference from agitators, mixers, and other forms of industrial vibration. Now you can depend on stable, accurate weight information regardless of motion on or around your scale.



RATTLETRAP

Expandable Power...


The system muscle of the IQ plus 810 begins with its ability to command 16 350-ohm load cells on up to four separate scale channels. The power grows as a seemingly endless array of options gives you the ability to handle complex processing requirements without the added cost of a PLC or software consultants.



Multi-scale Control...

Up to four independent scales can be operated from a single indicator. Ideal for tank farms, the 810 provides a bright, bold operator interface and offers easy, push-button operator access for displaying any tank's weight.

With the universal Remote I/O link or Profibus options the 810 allows precise, high-speed weight data to be utilized in operations with process networks.

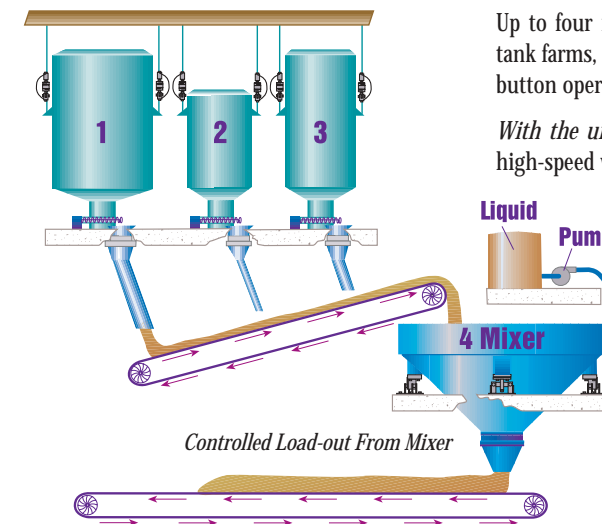

Making Multiple Batch Control a Reality...

Automated multiple-component batching systems are now possible using only one multi-scale IQ plus 810 with standard programmable batch control software and versatile hardware options.

This multi-ingredient batching operation illustrates the versatility of the 810. Three product hoppers, set up as individual scale inputs, are given commands to release ingredients sequentially in designated amounts onto the conveyor, which in turn feeds the fourth scale, the mixer hopper. Individual scale weight accumulators are available to provide total weight dispersed over each scale.

Conveyor motion is activated by the IQ plus 810, as well as mixer activity and timed dispatch of a liquid ingredient into the mixer hopper. Our unique RATTLETRAP® feature filters vibration out of the digital signal, providing accurate, stable weighments.

The powerful IQ plus 800 and 810 are available with optional Remote I/O link technology, allowing easy integration of fast, accurate weight control with Allen-Bradley PLC® or SLC™ automation systems.

Profibus is a quick, easy and cost effective interoperable interface for multi-vendor use. Through the DP interface, you have instant access to over 3 million Profibus devices, with over 1,750 unique products. An additional benefit is the ability to retrofit 800/810's in the field.



Communications Protocols Enhance 800/810 Functionality

STANDARD FEATURES & OPTIONS	IQ plus [®] 800	IQ plus [®] 810
NEMA 4X stainless steel enclosure	STD	OPT (WALL MOUNT)
NEMA 4 zinc die cast enclosure	N/A	STD
Vacuum Fluorescent Display (VFD)	STD	STD
Wall mount kit	STD	OPT
Panel mount kit	OPT	OPT
Time and date	STD	STD
20 updates/second	STD	STD
Jetpak™ 100 Hz A/D for 100 updates/second	OPT	OPT
RATTLETRAP® vibration control	STD	STD
20 programmable setpoint steps	STD	STD
3 digital inputs, TTL or hard contact closure	STD	STD
4 TTL digital outputs, expandable to 16	STD	STD
4-channel relay module	OPT	OPT
16-channel relay module (externally mounted)	OPT	OPT
0-10VDC/4-20mA analog output module	OPT	OPT
Expansion Board for: 3rd & 4th scale input channels	N/A	OPT
2nd analog output module	N/A	OPT
Revolution™ software package	STD	STD
200 truck ID memory w/6 modes of operation	STD	STD
2 communication ports: (1) EDP port, full duplex RS-232 or 20 mA optional; (1) printer port, simplex RS-232/20mA current loop	STD	STD
Up to 2 scale input capability	OPT	OPT
Up to 4 scale input capability	N/A	OPT
Power for 16 350-ohm load cells on single or multiple channels	STD	STD
48-segment LED bar graph module or 24 character alpha numeric display	OPT	OPT
Rate of change	OPT	OPT
Peak hold	OPT	OPT
Configurable print formats	STD	STD
ID numbering	STD	STD
Consecutive numbering	STD	STD
Accumulators	STD	STD
Supervisor setpoint key	OPT	OPT
Passwords	OPT	OPT
Allen-Bradley Remote I/O	OPT	OPT
Profibus	OPT	OPT

N/A - Not available



This interactive Windows®-based software program allows the operator to set up and calibrate the 800/810 indicator with ease.



SPECIFICATIONS	IQ plus [®] 800/IQ plus [®] 810
Display:	Large 55", 1.4 cm, 7-digit, 14-segment blue/green vacuum fluorescent. Decimal point available at each digit.
Keyboard:	25-key tactile feel
Bar Graph (optional):	48-segment LED display tracks, net or gross weight functions, or setpoint functions
Internal Resolution:	Selectable up to 740,000
Display Resolution:	Selectable up to 100,000 dd
Measurement Rate:	20 measurements/second
Excitation Voltage:	10±0.5 VDC, 16 x 350Ω load cells
Analog Filter:	Software selectable: 2, 8 Hz typical/3 pole, off (25 Hz)
Digital Filter:	Software selectable: 1, 2, 4, 8, 16, 32, 64, 128 RATTLETRAP 4, 8, 16, 32, 64, 128
Analog Output:	Optional: fully isolated 0-10V or 4-20 mA, 14 bit resolution
Digital Inputs:	3 inputs, TTL or switch closure, active low, special purpose setpoint-supervisor input
Digital Outputs:	4 TTL outputs
Expansion Digital Outputs:	12 additional TTL outputs (opt.)
EDP Port:	Full duplex, RS-232 or 20 mA CL output (input opt.) RS-485 (opt.)
Printer Port:	Simplex, RS-232 and 20 mA CL (output only)
Line Voltages:	115 or 230 VAC
Frequency:	50 or 60 Hz
Operating Temp.:	14° to 104°F/-10° to 40°C
Overall Dimensions:	
IQ plus 800:	10 in. W (25.4 cm) 7.75 in. H (19.7 cm) 6 in. D (15.2 cm)
IQ plus 810:	11.06 in. W (28.1 cm) 8.17 in. H (20.8 cm) 8.87 in. D (22.5 cm)
Weight:	
IQ plus 800:	12 lb (5.4 kg)
IQ plus 810:	15 lb (6.8 kg)
Enclosure Finish:	
IQ plus 800:	NEMA 4X, IP66, stainless steel
IQ plus 810:	NEMA 4, IP66, zinc die cast
Warranty:	Two year limited warranty
Approvals:	NTEP certified per H-44, at 10,000 Divisions, Class III/III.L, CC# 92-013. Also Canadian Weights & Measures Certified, AM-4840, 20,000 Divisions, Class III/IIIHD



IQ+800/IQ+810
CC# 92-013
n_{max} = 10,000
Class III/III.L

MEASUREMENT CANADA APPROVED
Legal-For-Trade
AM-4840
n_{max} = 20,000
Class III/IIIHD



Your Rice Lake Weighing Systems Distributor is:

RICE LAKE WEIGHING SYSTEMS

Industrial Solutions on a Global Scale®



230 W. Coleman St. • Rice Lake, WI 54868 • USA
TEL: 715-234-9171 • FAX: 715-234-6967 • WEB SITE: www.rlws.com

© Rice Lake Weighing Systems 2000 PN 30536 5/00
Specifications subject to change without notice